



# AC Reversible Motor 40W




## List of Motor Characteristics

Model of Motor		Output W	Voltage V	Frequency Hz	Poles P	Duty	Rated				Starting Torque		Capacitor/Ve μF/VAC
Motor	Motor with gear shaft						Speed r/min	Current A	Torque		N.m	kgf.cm	
5RK40A-A	5RK40GN-A	40	1ph110	50	4	30Min	1350	0.68	0.29	2.85	0.30	3.00	12.0/250
5RK40A-C	5RK40GN-C	40	1ph220	50	4	30Min	1350	0.35	0.29	2.85	0.30	3.00	3.0/450

■ The capacitor capacitance will be different under different voltage. A correct capacitor capacitance is required to match the applied voltage. ■ Wrong capacitor capacitance is the cause of trouble. You must confirm a correct voltage and select a correct model when your purchase order is placed.

## Overall Dimension of Gearbox

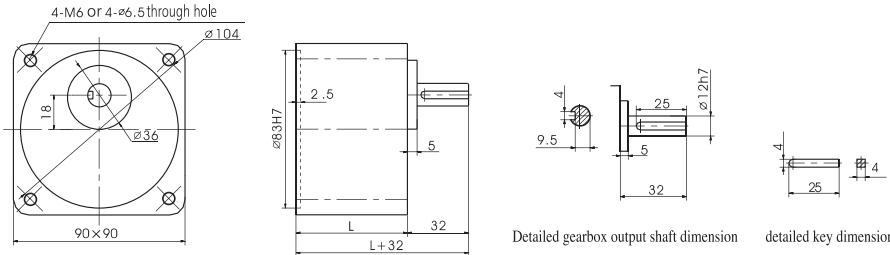


	Reduction Ratio	L(mm)	Weight (kg)
Gearbox	5GN3K-GN18K	42	0.73
	5GN20K-GN36K	60	1.03
	5GN40K-GN200K		1.13
Motor			2.30

## Allowable Torque on Gearbox

### Model of Gearbox:5GN□K

Frequency	Reduction Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	
			50Hz	Output Shaft Speed	r/min	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15
Allowable Torque	N.m	0.68			0.82	1.14	1.37	1.72	2.06	2.29	2.86	3.43	4.13	4.59	5.16	6.20	7.44	8.26	9.80	9.80	9.80	9.80	9.80	9.80	9.80
	kgf.cm	6.94			8.37	11.6	14.0	17.6	21.0	23.4	29.2	35.0	42.1	46.8	52.6	63.3	75.9	84.3	100	100	100	100	100	100	100
60Hz	Output Shaft Speed	r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	
		Allowable Torque	N.m	0.58	0.70	0.97	1.16	1.45	1.74	1.93	2.41	2.90	3.48	3.87	4.36	5.23	6.28	6.97	8.72	9.46	9.80	9.80	9.80	9.80	9.80
			kgf.cm	5.92	7.14	9.90	11.8	10.8	17.7	19.7	24.6	29.6	35.5	39.5	44.5	53.4	64.1	71.1	89.0	96.5	100	100	100	100	100

## Capacitor




capacity μF	Voltage	L±1	W±1	H±1	Type
Allowable Deviation±5%	V	mm	mm	mm	Down-lead
	3.0	450	47	22	
12.0	250	57	32	46	


### Model of Gearbox:5GN□K

Frequency	Reduction Ratio		180	200	
			50Hz	Output Shaft Speed	r/min
Allowable Torque	N.m	9.80			9.80
	kgf.cm	100			100
60Hz	Output Shaft Speed	r/min	10	9	
		Allowable Torque	N.m	9.80	9.80
			kgf.cm	100	100

## Wiring Diagram



## Motor Overall Dimension

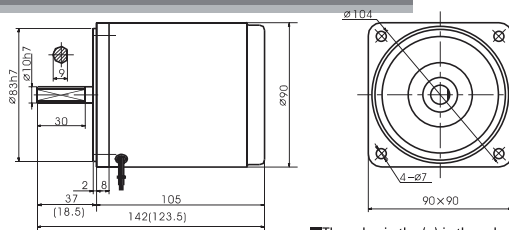

■ The value in the ( ) is the value of small gear shaft motor.