




GM48P



| | |
|-----------------|--|
| Type of Product | DC GEAR MOTOR |
| Model No. | GM48P |
| Applications | coffee machines, automatic products, induction bin, door-lock, medical devices |

| MODEL | VOLTAGE | AT NO LOAD | | AT MAXIMUM EFFICIENCY | | | AT STALL | | | |
|-------------------|---|------------|---------|-----------------------|---------|--------|----------|--------|--------|---------|
| | | SPEED | CURRENT | SPEED | CURRENT | TORQUE | | TORQUE | | CURRENT |
| | | RPM | A | RPM | A | mN.m | kg.cm | mN.m | kg.cm | A |
| GM48P600-370 | 24 | 6 | 0.015 | 4.57 | 0.048 | 1029 | 10.500 | 4312 | 44.000 | 0.153 |
| Base motor option | RS360,RS365,RF370,RS380,RS385,RS390,RS395,RF500,RF520 | | | | | | | | | |
| Gear ratio option | a:12.5,15,25,41.7(125/3),83.3(244/3),100,164.2,166.67(500/3), 246.3,308, 450, 985, 1846.875; b:34.6, 128.6, 400, 500, 600, 750, 2400, 4500 | | | | | | | | | |
| Note | The specifications and output shaft can be changed as customer's request. | | | | | | | | | |
| Packing detail | Carton, Size: 38X35.5X34CM;100pcs/carton; G.W:12Kg. | | | | | | | | | |

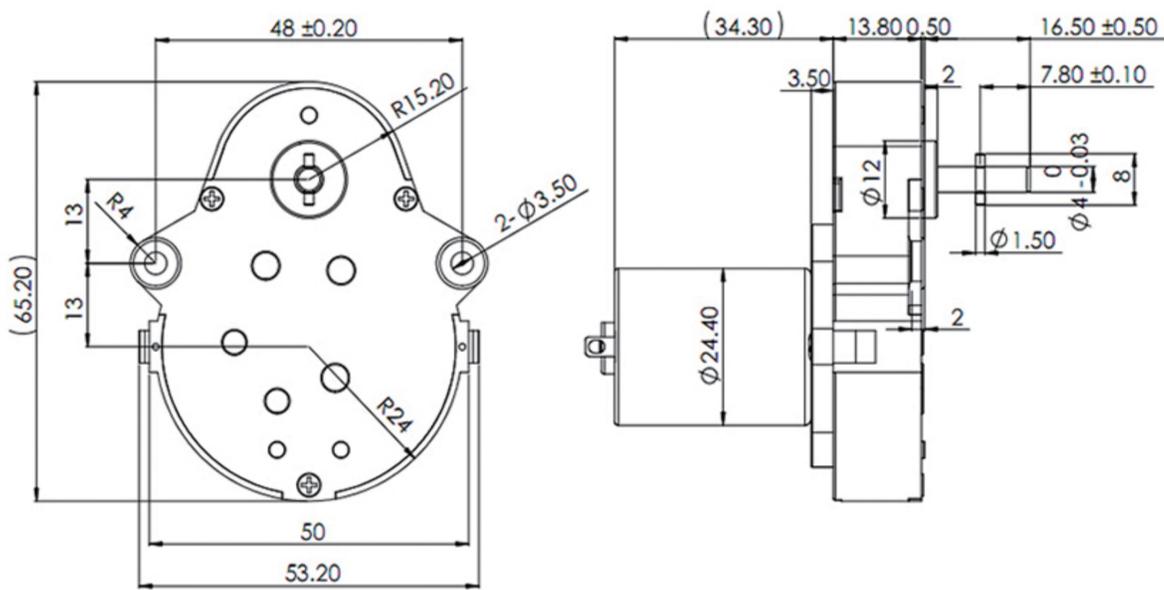


额定电压: D.C24V

转 向: CCW

| P ₀ | EF | I | N |
|----------------|-----|------|-------|
| 1 | 100 | 200 | 7 |
| 0.5 | 50 | 100 | 4 |
| [W] | [%] | [mA] | r/min |

— N: Speed: 转速
— I: Current: 电流
— P: Out power: 输出功率
— EF: Efficiency: 效率

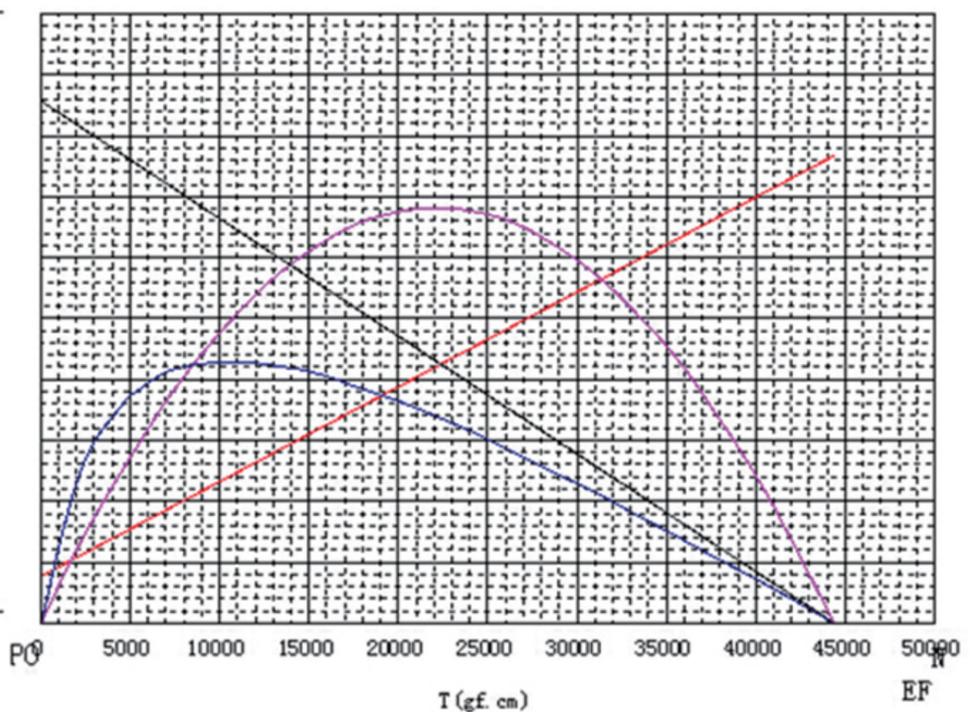

T: torque: 力矩

T (gf. cm)

EF