



Micro Dc Motor

RS-365 SH/SA/RH

Application:

Household Appliance、Water pump、Hair dryer。




Electrical Specification

Model	Voltage		No Load		At Maximum Efficiency				Stall			
	Operating Range	Nominal	Speed	Current	Speed	Current	Torque		Output	Torque		Current
			r/min	A	r/min	A	mN·m	g·cm	w	mN·m	g·cm	A
RS-365SH-2650	DC 6-24V	DC 18V	19000	0.21	16000	1.13	7.7	78.67	13.42	48.7	497	6.0
RS-365SH-10250	DC 18-30V	DC 24V	8000	0.07	6150	0.22	4.01	41.0	2.6	17.6	180	0.7
RS-365SH-14134	DC 15-30V	DC 24V	13700	0.14	11200	0.06	7.4	75	8.99	408	40	2.6
RS-365SH-12190	DC 6.8-36V	DC 24V	10500	0.08	8400	0.33	5.00	51	4.39	25.5	260	1.3
RS-365RH-2650	3-12V	12V	25500	0.4	20930	1.83	5.36	54.6	11.7	39.9	305	8.4
RS-365SA-12153	DC 12-24V	DC 24V	14500	0.13	11300	0.45	4.50	46	5.3	19.6	200	1.6

*Note:It's only typical technical data for reference, Special requirement can be customized.

Mechanical Dimensions

RS-365SH

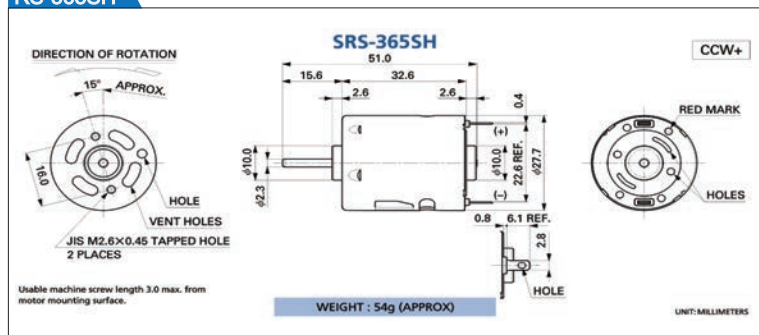

RS-365SA

